

Method for transmitting speech and data.

Publication number: EP0222076

Publication date: 1987-05-20

Inventor: KETTERLING HANS-PETER DIPL-ING; LANGE WOLFGANG

Applicant: BOSCH GMBH ROBERT (DE)

Classification:

- international: H04B7/26; H04B7/26; (IPC1-7): H04B7/26

- european: H04B7/26T

Application number: EP19860111245 19860814

Priority number(s): DE19853539818 19851109

Also published as:

EP0222076 (A3)
DE3539818 (A1)
EP0222076 (B1)


Cited documents:

EP0189822

Report a data error here

Abstract of EP0222076

The method is intended to avoid the disadvantages of the known FDMA (frequency division multiple access) methods and TDMA (time division multiple access) methods. According to the invention, a narrow-band time division multiple access method (FD/TDMA) is used, that is to say a combined frequency division multiple access/time division multiple access method. Transmission preferably occurs in n radio channels with a transmission rate of m kilobit/s, in such a manner that the total transmission rate is $r = m \cdot n \leq 100 \dots 200$ kbit/s. A multi-layered modulation is preferably used in such a manner that the transmission bandwidth is below the coherence bandwidth of about 250 kHz.

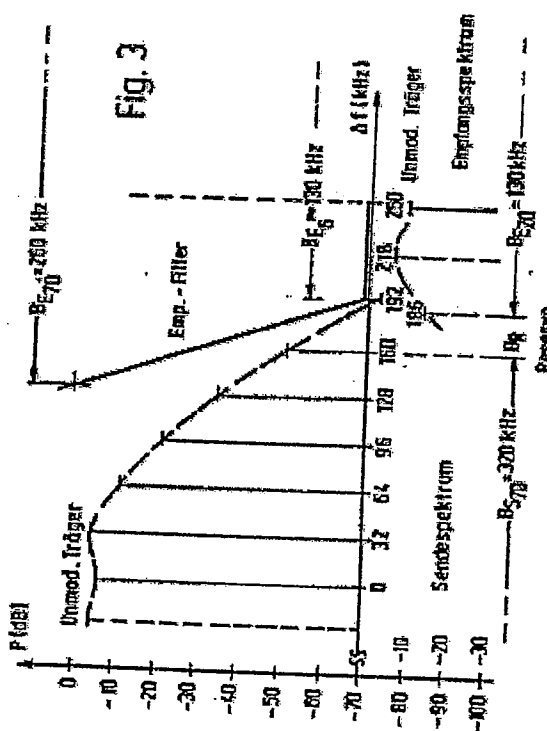

Data supplied from the *esp@cenet* database - Worldwide